


SCONCE WING

Wall Mount | Architectural LED Linear

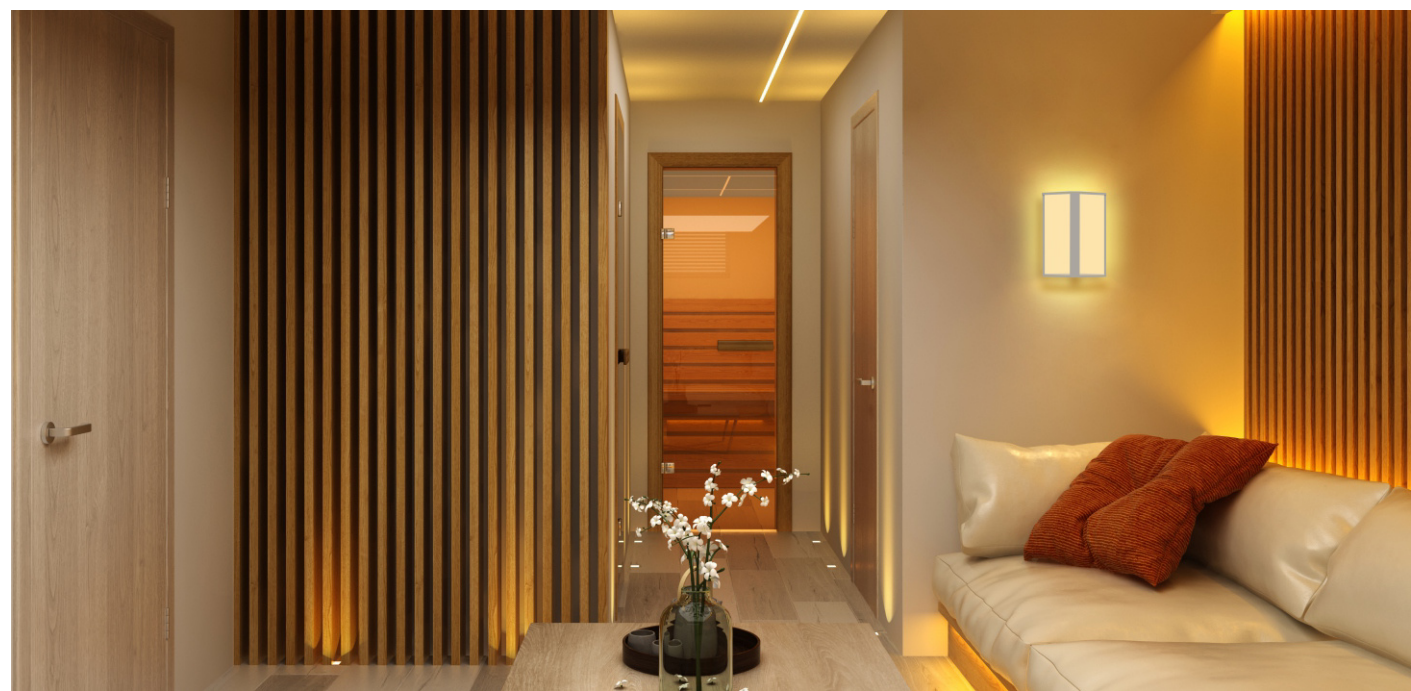

Combining superior esthetics and quality performance, Sconce Wing offers new opportunities to capture the beauty and benefits of architectural linear lighting. It offers three sizes with wattage and CCT adjustable for scalability. The sleek profile is designed to blend into clean, minimalist architectural spaces. Reaching 100 lumen / watt with 90+ CRI, we strive to challenge the highest visual comfort standard by offering ultra-thin semi-transparent vertical optics. Easy install in the field which is perfect for applications that include corridor, open offices, hospital, anywhere you want to make a statement.

It can be wall or surface mounted and adds a layer of light on the walls that feels less institutional, to soften facility ambiance and enable interior design cohesiveness. This innovative produce design brings both performance and aesthetics to any design applications.

Feature

- Ultra-thin semi-transparent optics
- 12", 18" and 24" options, Shallow depth 2"
- Maximum 20W, Wattage selectable (50%/75%/100%)
- Up to 100lm/w, 90+ CRI
- CCT adjustable from 3000K, 3500K, 4000K
- 0-10V dim, 10% standard, 1% optional
- Wall mount or surface
- White finish or custom*

PERFORMANCE

Length	Wattage Selectable	Lumen@4000K	Efficacy@4000K
12"	20W/15W/10W	1800LM	90LM/W
18"	20W/15W/10W	1900LM	95LM/W
24"	20W/15W/10W	2000LM	100LM/W

All efficacy is $\pm 5\%$ base different CCT. Check the IES file to gain the accurate data.



ADJUSTABLE CCT
3000K
3500K
4000K

SELECTABLE WATTAGE
High
Medium
Low



SCONCE WING

Wall Mount | Architectural LED Linear

PRODUCT ORDERING GUIDE

Example: WS-WGA-WTW12

WS-WGA	W	TW	
Product Series	Mounting	CCT	Length
WS-WGA Sconce Wing	W Wall Mount QuickShip	TW CCT adjustable 3000K/3500K/4000K QuickShip	12 12inch QuickShip 18 18inch QuickShip 24 24inch QuickShip

OPTIONAL FUNCTIONS

1-10V Dim	Optional Function
D10 120-277V AC, Dims to 10% <i>Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-DL.</i> QuickShip	EME Emergency - External Only external 16w or 25w LED emergency driver with standard indicator available and need field-installed. QuickShip



STRUCTURE

Light Guide

Ultra-thin semi-transparent light guide made of PMMA material, allows distribution of controlled light in all 3-dimensions to put light on both vertical and horizontal planes within the space.

Construction

Housing: Extruded aluminum
End Cap: Die cast aluminum
Smooth Lens: Uniform acrylic lens
Finish: Powder coat white or custom*.

Electrical

Min Internal LED Driver	It is powered by Class 2 high efficiency LED driver, with a standard 0-10V dimming that works with many types of controls. Continuous dims to 10% (standard), 1% (optional) . Tested Dimmers: LEVITON DD710, LUTRON NTSTV-DV, LEGRAND RH4FBL3PTC, LUTRON DVSTV, LEVITON IP710.
THD	<20%
Power Factor	>0.9
Input Voltage	Standard electronic drivers are UL recognized and available for 120-277V AC input voltage.

LED System

CRI	Minimum 90 color rendering index
CCT	CCT adjustable from 3000K, 3500K, 4000K with a great color consistency.
LED	Minimum 50,000h with 87.8% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.
Environment	damp rated for ambient operating temperature of -20°C to +40°C (-4° to+104°F)


Mounting

Horizontal or vertical orientation. Wall mount or surface.

Approvals


- cULus listed-Pending
- Suitable for damp locations
- Designed for indoor use only
- 5-year limited warranty for parts and components (Labor not included)

DIMENSIONS

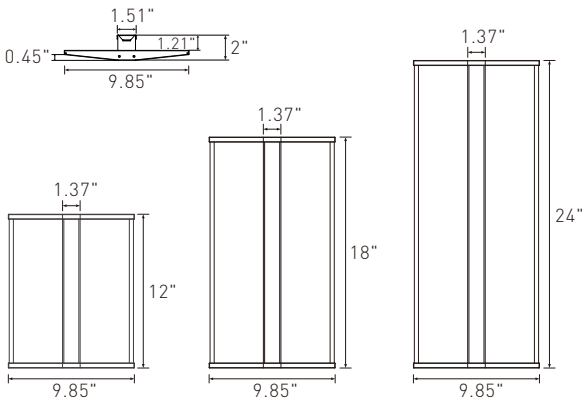


*Additional cost and/or lead time on customized fixtures may apply. Some fixtures require an MOQ. Please contact your sales rep for more information.

DISTRIBUTION DIAGRAM

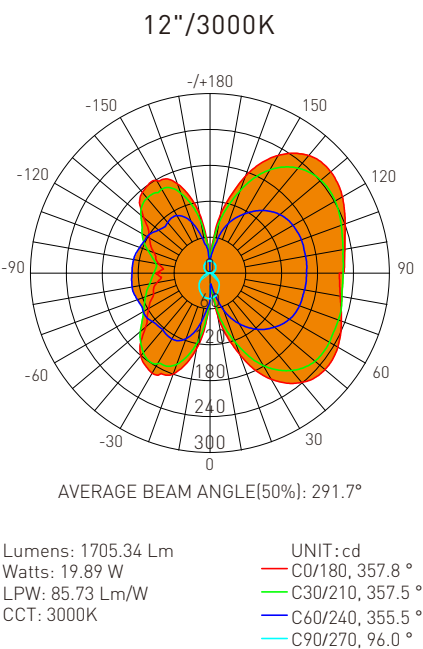

Zonal Flux Diagram						Zonal Lumens		Luminance cd/(m2)		
τ	C0	C45	C90	C135	C180	τ	φ total	G(DEG)	C0/180	C90/270
5	29.11	21.74	41.80	68.86	85.29	0-5	0.9954	85	43804	427
10	69.27	41.94	40.61	101.7	127.2	5-10	5.181	80	22332	360
15	109.7	72.08	39.20	126.5	157.5	10-15	14.80	75	15368	341
20	144.0	97.30	36.17	146.7	179.4	15-20	31.48	70	11989	337
25	178.8	121.3	32.93	156.2	186.7	20-25	56.11	65	9997	338
30	205.0	143.8	29.70	157.8	193.5	25-30	88.94	60	8662	341
35	224.6	163.2	26.81	158.1	188.6	30-35	129.8	55	7664	412
40	238.6	178.3	23.92	162.0	180.7	35-40	178.0	50	6849	471
45	247.7	188.4	20.95	159.9	164.1	40-45	232.3	45	6145	520
50	250.9	195.2	17.26	153.5	140.6	45-50	291.4			
55	250.6	200.2	13.48	147.8	128.3	50-55	354.3			
60	246.9	204.7	9.706	146.0	118.4	55-60	420.2			
65	240.8	207.6	8.141	143.1	109.5	60-65	488.5			
70	233.7	208.3	6.576	139.5	100.2	65-70	558.5			
75	226.7	207.0	5.024	137.1	97.74	70-75	629.6			
80	221.0	205.2	3.567	134.8	89.70	75-80	701.0			
85	217.6	205.7	2.122	130.5	81.90	80-85	772.7			
90	216.3	205.4	0.6775	126.8	82.76	85-90	844.8			
95	225.7	206.6	2.282	129.9	78.34	90-95	917.0			
100	228.7	207.0	3.886	133.5	86.67	95-100	988.9			
105	233.3	209.4	5.491	138.0	93.97	100-105	1061			
110	240.4	211.3	7.097	142.8	99.35	105-110	1132			
115	247.9	212.8	8.704	146.7	109.6	110-115	1204			
120	255.5	213.3	10.31	150.9	117.0	115-120	1273			
125	260.9	212.0	11.73	154.8	125.5	120-125	1341			
130	263.8	208.8	12.98	157.4	145.1	125-130	1406			
135	262.8	201.7	14.22	158.4	167.3	130-135	1467			
140	256.8	192.3	15.46	160.5	176.3	135-140	1523			
145	244.7	179.6	16.43	160.1	180.5	140-145	1572			
150	227.2	163.7	17.23	161.3	178.7	145-150	1615			
155	203.6	143.1	18.00	155.9	173.9	150-155	1649			
160	171.9	119.5	18.78	139.8	158.7	155-160	1674			
165	133.5	96.28	19.41	114.5	133.8	160-165	1691			
170	97.90	68.54	20.00	80.47	100.4	165-170	1701			
175	49.01	38.06	20.59	47.06	50.56	170-175	1705			
180	21.18	21.18	21.18	21.18	21.38	175-180	1705			
DEG	LUMINOUS INTENSITY:cd					UNIT: lm				

DISTRIBUTION DIAGRAM

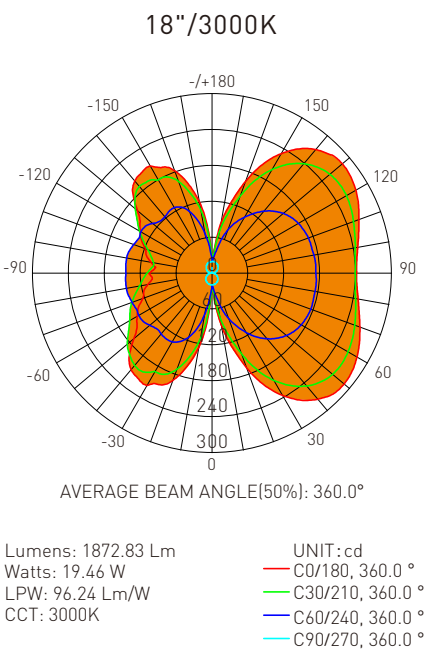


Zonal Flux Diagram					
τ	C0	C45	C90	C135	C180
5	39.44	30.78	19.83	50.47	69.50
10	85.88	56.38	19.60	91.31	124.0
15	125.8	87.38	19.33	122.9	160.8
20	167.7	113.9	18.73	148.0	190.5
25	206.2	142.1	18.10	164.0	205.8
30	236.0	168.0	17.46	169.5	217.5
35	259.3	189.3	16.45	169.5	215.6
40	275.3	206.6	15.44	177.4	210.7
45	285.8	217.2	14.40	179.5	195.7
50	288.3	225.0	13.10	174.1	170.5
55	285.8	230.0	11.77	164.8	153.3
60	280.0	232.3	10.45	159.2	144.6
65	272.1	232.0	8.805	152.5	136.0
70	263.1	230.4	7.165	144.0	122.9
75	254.7	228.1	5.531	136.8	118.1
80	248.1	225.2	3.960	131.7	108.9
85	243.2	224.1	2.396	129.9	100.6
90	241.7	222.2	0.8314	128.9	108.8
95	242.9	223.4	2.405	136.2	95.89
100	247.3	223.8	3.979	143.8	103.5
105	253.8	225.8	5.557	148.0	113.5
110	261.5	227.3	7.173	151.7	118.6
115	270.2	227.9	8.794	155.8	130.1
120	277.6	227.3	10.41	161.0	138.5
125	282.6	224.4	12.19	165.4	147.1
130	284.5	219.1	13.38	168.7	162.2
135	280.3	209.5	14.50	172.2	187.1
140	269.8	196.9	15.61	171.1	201.2
145	253.7	180.8	17.12	165.7	205.4
150	230.5	160.6	17.78	164.5	207.0
155	200.6	135.8	18.32	160.5	195.5
160	162.3	108.2	18.86	146.2	181.9
165	121.5	83.61	19.64	122.4	154.7
170	82.87	52.39	19.76	92.53	120.2
175	36.90	28.53	19.80	53.63	69.53
180	19.84	19.84	19.84	19.84	19.67
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens	
τ	φ total
0-5	0.7478
5-10	4.726
10-15	14.58
15-20	32.22
20-25	59.03
25-30	95.31
30-35	141.1
35-40	195.7
40-45	257.7
45-50	325.3
50-55	397.3
55-60	472.6
60-65	549.8
65-70	628.5
70-75	707.7
75-80	786.9
80-85	866.1
85-90	945.5
90-95	1025
95-100	1103
100-105	1182
105-110	1260
110-115	1337
115-120	1413
120-125	1487
125-130	1557
130-135	1623
135-140	1683
140-145	1736
145-150	1780
150-155	1815
155-160	1841
160-165	1859
165-170	1868
170-175	1872
175-180	1873
UNIT: lm	

Luminance cd/(m2)		
G(DEG)	C0/180	C90/270
85	34153	336
80	17487	279
75	12047	262
70	9416	256
65	7880	255
60	6853	256
55	6099	251
50	5491	249
45	4947	249

DISTRIBUTION DIAGRAM

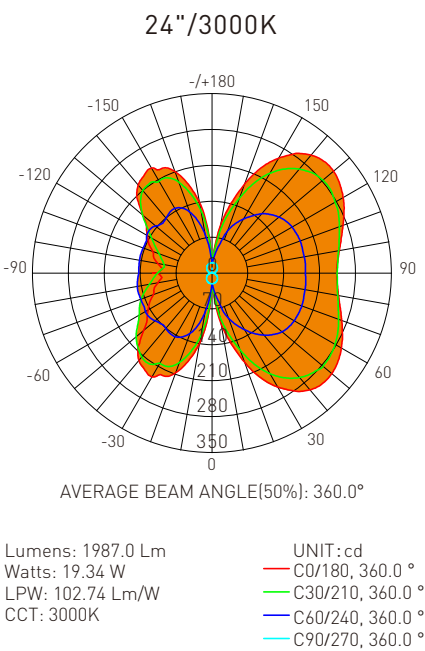

Zonal Flux Diagram					
τ	C0	C45	C90	C135	C180
5	45.12	35.10	20.98	55.95	77.25
10	98.35	61.48	20.75	102.1	138.0
15	140.4	100.4	20.47	136.2	176.3
20	184.1	127.8	19.85	162.1	206.7
25	225.4	157.8	19.19	177.8	221.6
30	256.4	184.6	18.53	182.6	233.7
35	280.9	206.9	17.55	181.4	229.6
40	297.4	224.0	16.57	189.7	222.1
45	304.8	235.2	15.56	188.3	204.0
50	305.1	242.7	14.29	178.0	174.2
55	300.0	246.5	12.98	163.9	154.6
60	291.3	246.6	11.67	153.7	144.0
65	280.5	244.0	9.859	143.0	134.4
70	269.4	240.3	8.047	133.9	121.9
75	258.9	236.9	6.243	127.8	117.1
80	250.4	232.9	4.501	123.1	107.2
85	245.2	231.6	2.766	124.2	98.27
90	243.1	229.4	1.031	126.0	116.4
95	245.6	231.7	2.675	134.8	96.74
100	252.2	233.0	4.319	144.0	107.3
105	260.9	236.9	5.967	150.5	117.9
110	272.0	240.3	7.646	157.3	123.0
115	284.0	242.6	9.330	165.6	136.1
120	295.3	243.9	11.01	174.2	145.8
125	304.2	243.4	12.57	181.1	156.2
130	309.5	239.5	13.86	188.5	176.3
135	208.8	231.9	15.13	194.4	207.3
140	300.5	219.7	16.39	195.1	224.3
145	285.2	202.3	17.59	189.2	232.2
150	258.6	181.1	18.37	189.5	236.7
155	226.5	153.6	19.10	186.8	226.3
160	183.6	122.8	19.83	171.2	210.4
165	138.2	94.43	20.53	144.4	179.2
170	92.67	56.27	20.72	111.1	139.3
175	41.60	31.30	20.84	63.97	77.83
180	20.97	20.97	20.97	20.97	20.63
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens	
τ	φ total
0-5	0.8098
5-10	5.237
10-15	16.22
15-20	35.69
20-25	65.08
25-30	104.6
30-35	154.2
35-40	212.9
40-45	279.0
45-50	350.7
50-55	426.5
55-60	504.9
60-65	584.9
65-70	665.7
70-75	746.8
75-80	827.6
80-85	908.6
85-90	990.0
90-95	1071
95-100	1152
100-105	1234
105-110	1315
110-115	1396
115-120	1476
120-125	1556
125-130	1632
130-135	1705
135-140	1771
140-145	1830
145-150	1881
150-155	1921
155-160	1951
160-165	1971
165-170	1982
170-175	1986
175-180	1987
UNIT: lm	

Luminance cd/(m2)		
G(DEG)	C0/180	C90/270
85	24253	274
80	12431	223
75	8624	208
70	6789	203
65	5722	201
60	5023	201
55	4510	195
50	4092	192
45	3716	190