LED EMERGENCY LIGHT

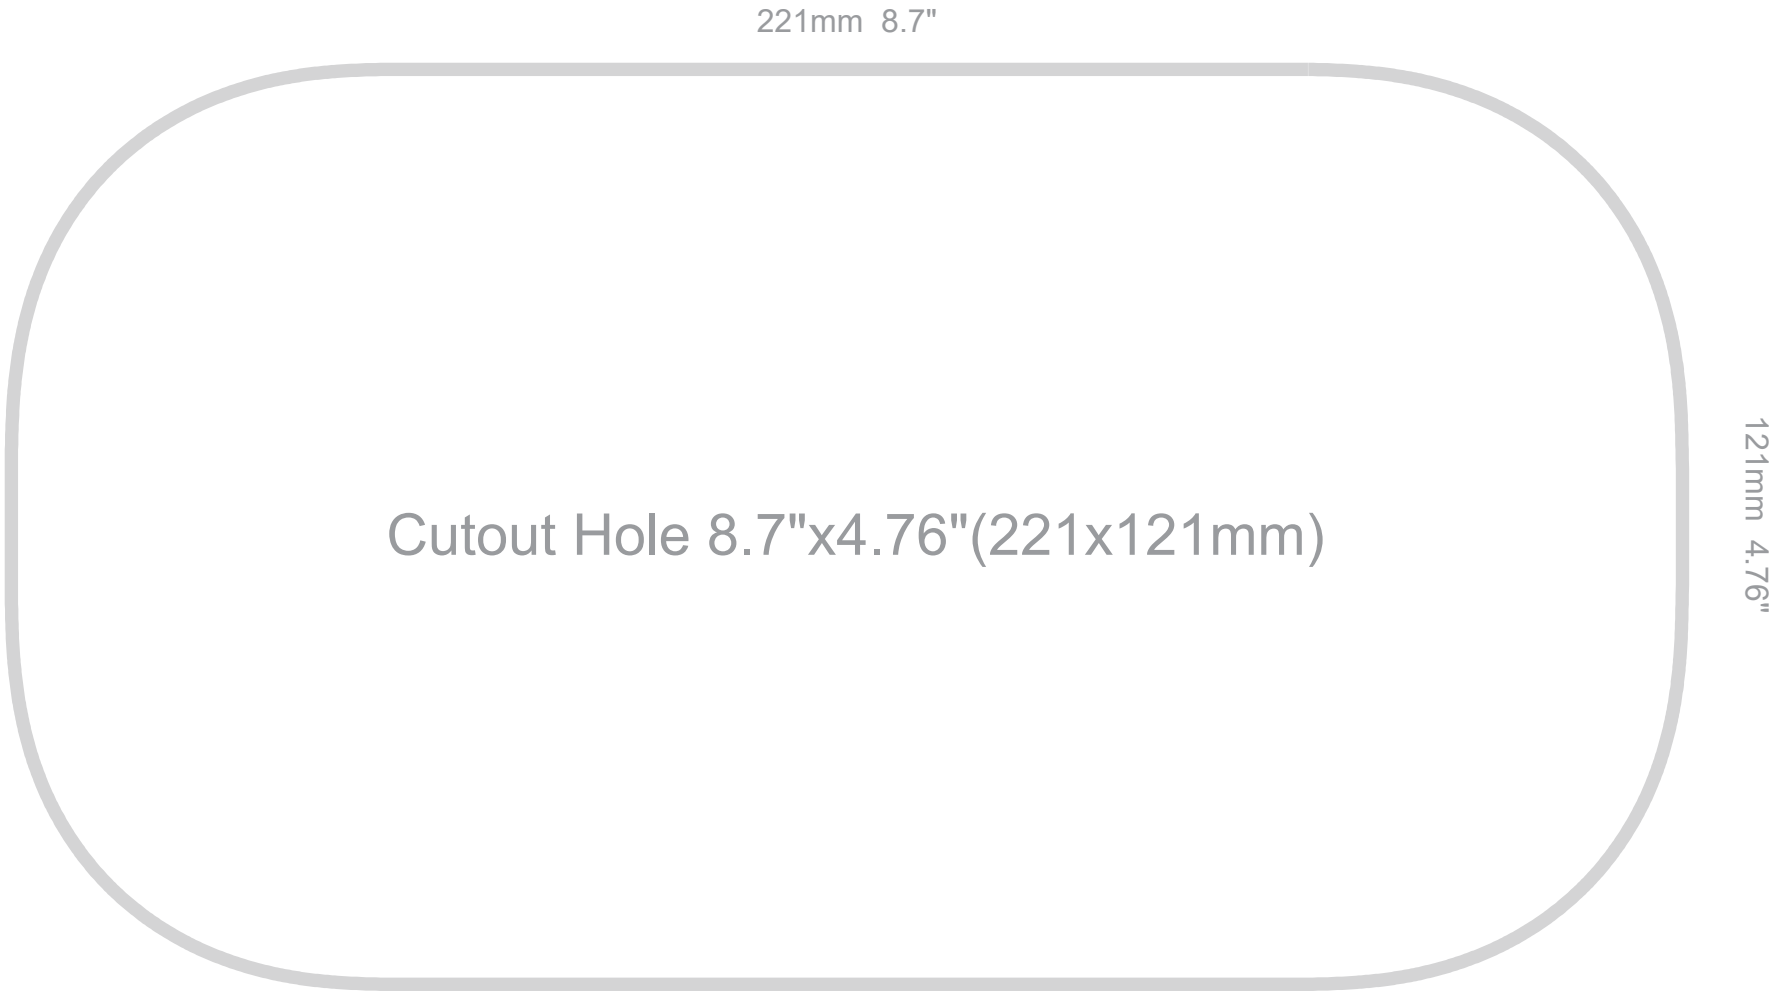

THANK YOU
We strive to continually create quality products designed to enhance your home.Visit us online to see our full line of products available for your home improvement needs.

LED EMERGENCY LIGHT

Safety Information

IMPORTANT SAFEGUARDS.READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

When using electrical equipment,basic safety precautions should always be followed including the fallowing:

- ☐ Consult your local building code for approved wiring and installation guidelines.
- ☐ This product is for indoor use only.
- ☐ Do not mount this product near a gas or electric heater.
- ☐ This product should be mounted in a location and at a height where it will not be readily subjected to tampering by unauthorized personnel.
- ☐ The use of accessories is not recommended by the manufacturer,and my cause unsafe conditions.
- ☐ Do not use this product for anything other than its intended use.
- ☐ All service shall be performad by qualified service personnel.
- ☐ This product must be installed and maintained in accordance with the applicable installation codes by a person familiar with the construction operation of the product and the hazards involved.
- ☐ Maximum mounting height is 18.1 ft (5.57 m).

⚠ WARNING:Before beginning installation,turn off electricity by removing the fuse or turning off the clrcuit breaker.

⚠ WARNING:Disconnect power before servicing the product. All service should be performed by a qualified electrician.

⚠ WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTICE:This equipment has been tested and found to comply with the limits for a Ctass B dipital device,pursuant to Part 15 of the FCC Rules.These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,uses and can radiate radio frequency energy and,if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference.will not occur in a particular installation.If this equipment does cause harmful interference to radlo or televislon reception, which can be determined by turning the equipment off and on,the user is encouraged to try to correct the interference by one or more of the fullowing measures:

- ☐ Reorient or ralocate the receiving antenna.
- ☐ Increase the separation between the equlpment and recelvar
- ☐ Connect the equipment into an outfet on a circuit different from that to which the recelver is connected.
- ☐ Consult the dealer or an experienced radio technician for help.

SAVE THESE INSTRUCTIONS

Warranty

WHAT IS COVERED

The manufacturer warrants this lighting fixture to be free fromdefects in materials and workmanship for a period of five(5) years. and five(5) years for the battery, from date of purchase. This warranty applies only to the original consumer purchaser and only to products used in normal use and service. If this product isfound to be defective,the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse,accident, modifications, alterations, neglect, or mishandling.

WHAT IS NOT COVERED

This warranty shall not apply to any product that is found to have been improperly installed,set-up,or used in any way not in accordance with the instructions supplied with the product.
This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse negligence, alteration, faulty installation, or any other failure not relatingto faulty material or workmanship.
This warranty shall not apply to the finish on any portion of theproduct,such as surface and/or weathering,as this is considered normal wear and tear.
The manufacturer does not warrant and specifically disclaims any warranty,weather express or implied,of fitness for a particular purpose,other than the warranty contained herein.The manufacturer specifically disclaims and liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor/expense costs involved in the replacement or repair of sald product.
Contact the Customer Service Team.

Pre-Installation

PLANNING INSTALLATION

Before beginning assembly,installation,or operation ofthe product,make sure all parts are present.Compare parts with the package contents list. If any part is missing or damaged, do not attempt to assemble, install, or operate the product. Contact customer service for replacement parts.

NOTE:Keep your receipt and these instructions for proof of purchase.

TOOLS REQUIRED

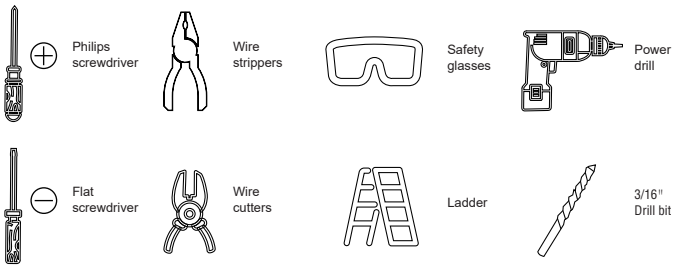

LED EMERGENCY LIGHT

1 spring mounting
Make a hole at the position of the opening card and reserve the power cable.



2 Open the rear case (G), knock open the hole, and install the hose.



3 Connecting the wiring(The connection is complete. Close the cover.)

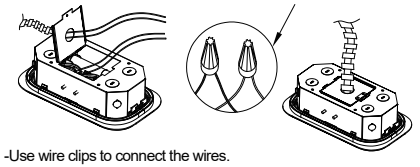

-Use wire clips to connect the wires.
-Use black and white wires. Connect the black power wire to the black fixture wire, and the white power wire to the white fixture wire.

4 Press down on the spring and push the lamp into the hole. (The spring is installed successfully.)



5 Measure the spacing of the cross beams. The Bracket B (D) and A (E) are fixed together through the support plate (F). Position the support travel distance according to the cross beam spacing, and pre-lock two screws to fix one side.(Shaft travel 370mm-630mm).



6 The bracket is combined with the rear case (G) and is fixed by locking 4 butterfly nuts.

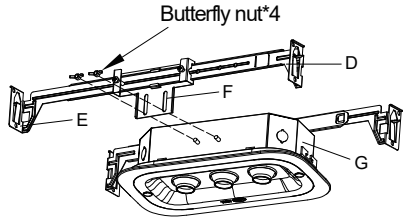

7 When the two ends of the bracket are pressed against the crossbeam, tighten the other two screws of the support plate (F) of the bracket. Hit the hooks at both ends of the bracket B(D) and bracket A(E) to fix them to the crossbeam, and then lock the 8 screws. (The bracket installation is completed.)

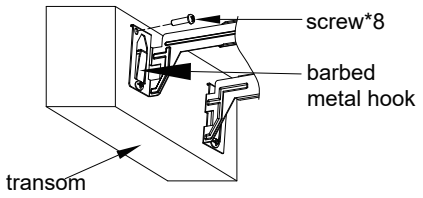

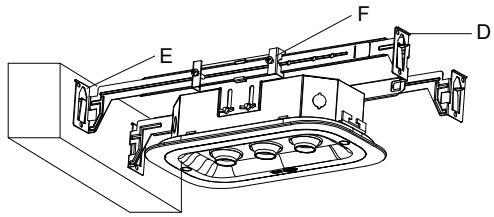

bracket mounting



spring mounting



Part	Description	Quantity
A	Lamp body	1
B	Circular decorative panel	1
C	Square decorative panel	1
D	Bracket B(optional)	2
E	Bracket A(optional)	2
F	support plate(optional)	2
G	rear case	1
H	Spring	2