

CPA SELECTABLE CANOPY LIGHT

LED Canopy Light with Selectable CCT and Lumen

Introduction

- ◆ As the latest generation of Canopy Light, the CPA Series boasts extremely high cost-effectiveness and offers complete configurations. The CPA Series delivers 4,050lm to 9,400lm lumens, which can replace 100W-250W HID luminaires.
- ◆ Photocell or microwave sensor is available.
- ◆ Surface or Pendant mounting for option.



Product Specifications

Construction:

- ◆ Die-casting aluminum housing with four 1/2" NPT side conduit entries.

Optics:

- ◆ Selectable CCT 4000K or 5000K (Default setting), CRI > 70.
- ◆ Heat-resistant polycarbonate lens.

Electrical:

- ◆ 0-10V dimmable driver, which can dim from 100% down to off.
- ◆ Input voltage AC120-277V for US market, AC120-347V for Canada market, and 50/60Hz.

Finish:

- ◆ Dark bronze is standard. White and other customized colors are available.

Mounting:

- ◆ Quick mount plate for surface or junction box mounting.
- ◆ Pendant mounting can be done via a 3/4" NPT pipe, which is not supplied.



Ambient Temperature:

- ◆ -40°F (-40°C) to 113°F (45°C)

Compliances:

- ◆ cULus listed for wet locations.
- ◆ DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org.

Warranty:

- ◆ 5-year limited warranty. Complete warranty terms located at: <https://xsylights.com/warranty/>

Ordering Guide

EXAMPLE: X-CPA(63/45/30)W-(40/50)KUV-XY

Brand X	Product name CPA	Wattage XXXW	CCT XXK	Input Voltage ³ AA	Sensor X	Photocell Y
XS	CPA	(63/45/30)W ¹	(40/50)K ²	UV=120-277V LV=120-347V	Blank=without motion Sensor S=with motion Sensor	Blank=without photocell P=with photocell


Note: 1. (63/45/30)W=63W, 45W, 30W Selectable, 63W default setting.
2. (40/50)K=4000K, 5000K Selectable, 5000K default setting.
3. The Input Voltage AC120-277V is for US Market, AC120-347V is for Canada Market.

Performance Data


Lumen values are based on 120V AC input product configuration, contact for performance data on any configurations not shown here.

Model #	Lumen Level	Wattage Selectable	Nominal CCT	CCT Selectable	Lumens	Watts	LPW	CRI
X-CPA(63/45/30)W -(40/50)KAA-XY	1	Yes	4000K	Yes	4,900	30	163	>70
			5000K		4,450	30	148	
	2		4000K		7,100	45	158	
			5000K		6,450	45	143	
	3		4000K		9,400	63	149	
			5000K		8,550	63	136	

Photometrics

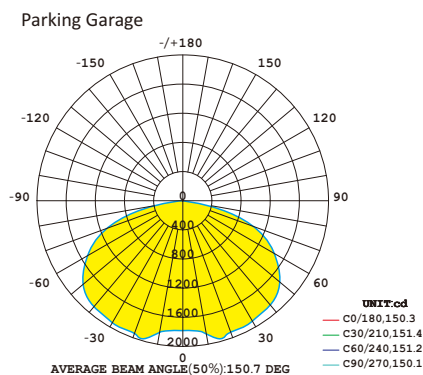

Power Selection And CCT Selection Capability

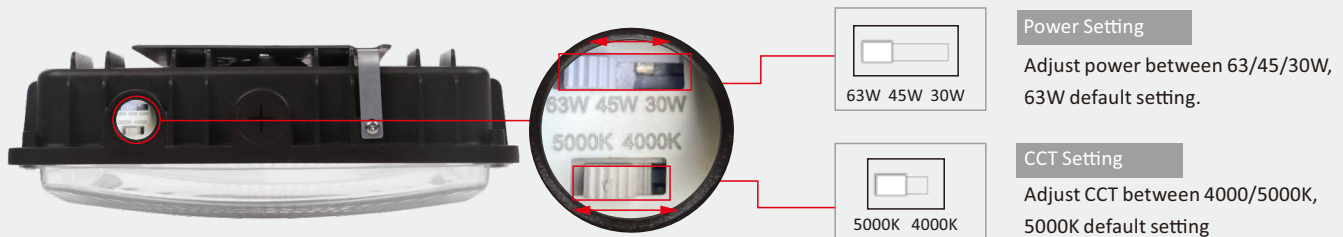

Accessories

Control Options



Factory-Installable ONLY

	XPC-B Photocell -With Sunshade Cover		XMSMH-H01-CPA Microwave sensor HB001VCR for X-CPA (Note: The driver must have 12v)
--	--	---	--

Emergency Battery Backup

Factory-Installable ONLY


Field-Installable / Field-Use ONLY (purchased separately)

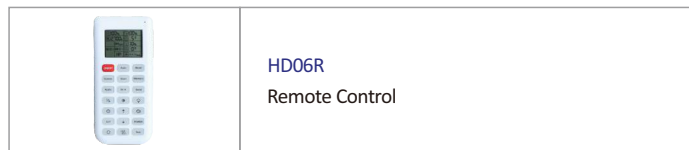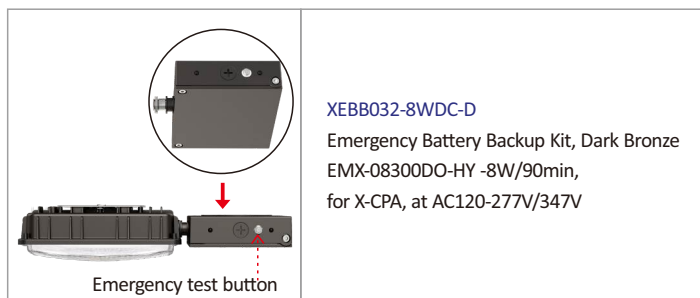

Electrical Data

Model Series	Wattage(W)	Current (A)				
		Input Voltage (V)				
		120	208	240	277	347
X-CPA(63/45/30)W	30	0.28	0.16	0.14	0.12	0.10
	45	0.42	0.24	0.21	0.18	0.14
	63	0.58	0.34	0.29	0.25	0.20

Dimensions

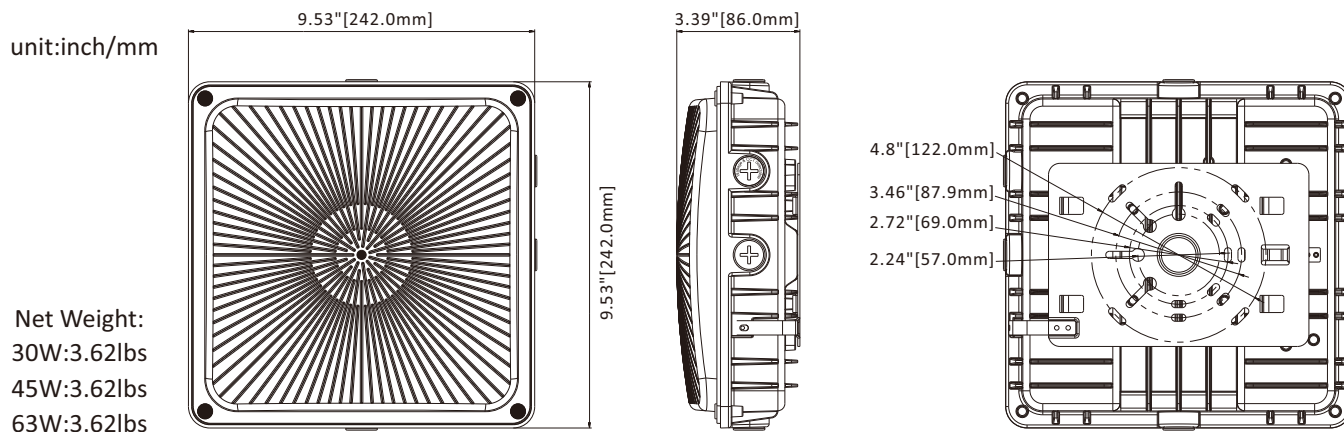

Shipping Information

Model	Carton Size (in)	G.W. (lbs)	Per carton (pcs)	20GP (pcs)	40HQ (pcs)
X-CPA(63/45/30)W	24.02 x 10.94 x 11.18	29.76	6	2,904	7,992

Note:The packaging data can sometimes be outdated or incomplete. For the most reliable information, please reach out to us directly.