


LED WRAP LIGHT INSTALLATION GUIDE

Product description

Easily replace outdated tubes and fixtures with this wide LED Wrap Light. Optimize energy usage and enhance performance by adjusting brightness (wattage selectable) and selecting the appropriate color temperature (CCT selectable) for your needs. This light comes with a pre-installed 3.5mm audio jack sensor port. Simply plug in the sensor to use.

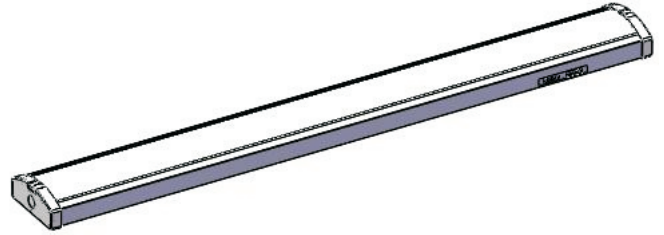

WARNING: Ensure the power is turned off at the fuse or circuit breaker before starting installation.

Open the plastic clips at both ends of the lamp, remove the PC cover, and then take out the installation accessories. (If there is a sensor, you need to detach the wire connector)

1. Remove the PC cover

2. Locate mounting holes at both ends of the fixture

3. Use an electric drill to create mounting holes

4. Tap the expansion screw into the hole as shown

5. Wiring. (L to Live, N to Neutral, G to Ground)

6. Fix the fixture to the remaining four holes with screws.

7. Take the PC cover and install it on one end of the input lamp first. Then install the other end (the lamp end cap here can be bent outward at an angle to better insert the PC cover), and then close the plastic clips on end caps. If there is a sensor, it needs to be plugged the connector together.

Plastic Clips on Ends **Sensor Connector**

WARNING ---To reduce the risk of fire, electric shock, or physical injury:

- This product should be installed by a person familiar with the construction and operation of the product and the hazards involved. Safety eyeglasses and gloves are recommended.
- Check for shipping damage before installing. If the product is damaged, do not use it.
- Turn off the switch and circuit breaker before installing this fixture.
- Proper grounding is required to ensure safety.
- Clean the fixture regularly to ensure proper operation. Do not clean with harsh solvents.
- Use safety precautions and abide by regional and local laws or regulations.