


LED Architectural Wall Pack

Up & Down Lighting, CCT Selectable, Power Adjustable, Photocell ON/OFF

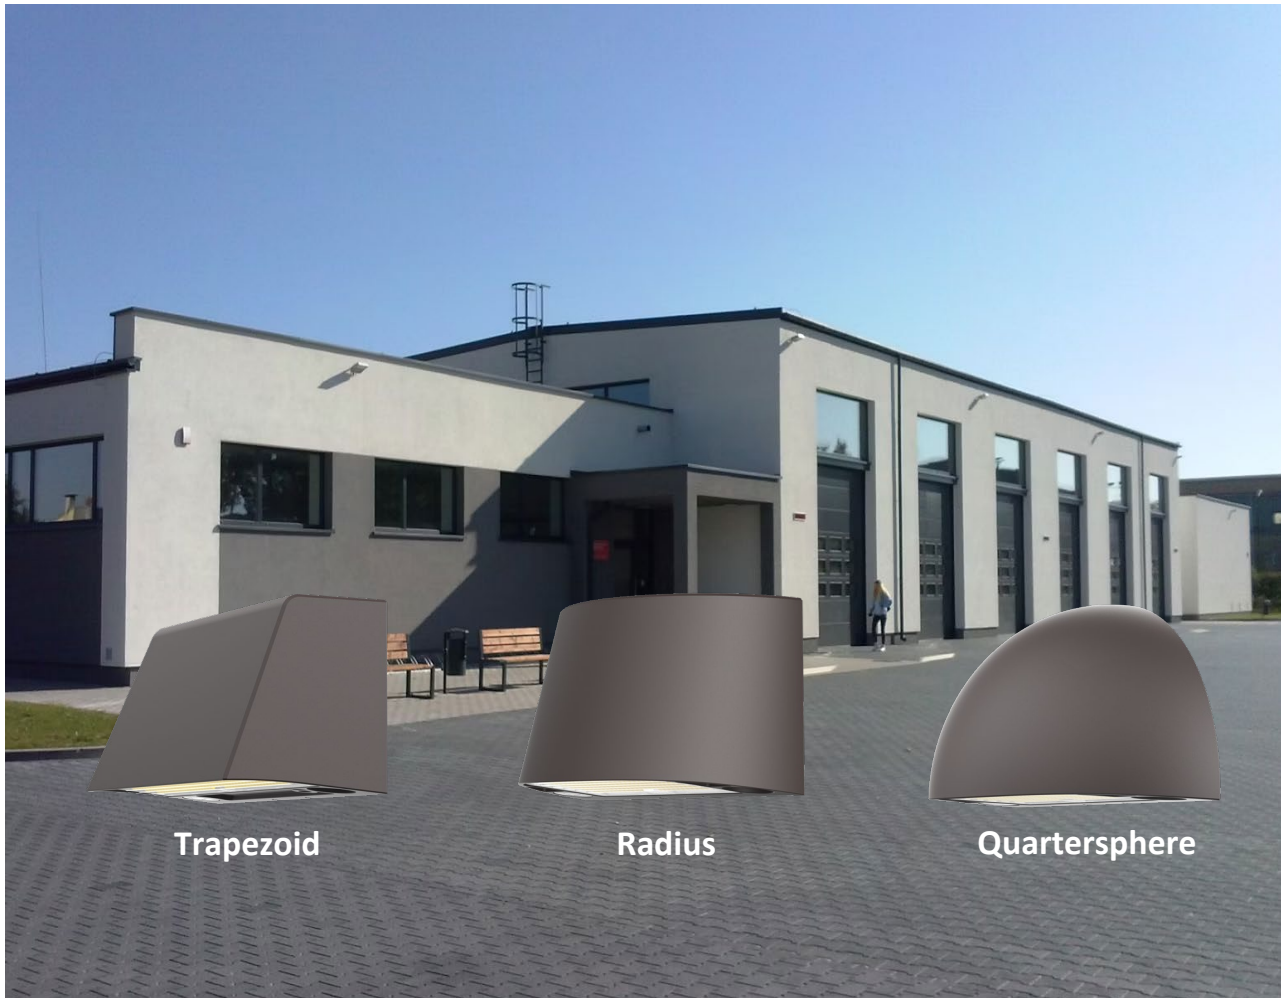

Trapezoid

Radius

Quartersphere

Description



OSL's new LED wall packs are your first choice for wall-mounted lighting projects. Three geometric shapes: Trapezoid, Quartersphere and Radius available for different environment. 4 IN 1 switch is selectable for lighting direction, CCT, wattage, and photocell ON/OFF control. D2D photocell can automatically turn off at sunrise or during the day, and automatically light up at sunset or night.

Application

- Pathways
- Hospitality
- Walkways
- Hallways
- Outdoor Commercial
- Outdoor Residential

Certificate

- UL
- DLC




LED Architectural Wall Pack

Key Features


- High efficacy up to 150 lm/W.
- 3CCT(3000/4000/5000K) and 4 Wattages Selectable offer SKU reduction.
- AC120-277V & AC120-347V for options.
- DIP switch for Full, Down lighting modes.
- ADC12 Aluminum die-casting housing provides excellent heat dissipation.
- Automated Dusk to Dawn photocell functionality.
- Microwave motion sensor and emergency driver available.
- Waterproof rated IP65.

Die-cast aluminum housing

Durable housing provides good heat dissipation.



Field-adjustable CCT
Field-adjustable wattage
Photocell ON/OFF
Light Direction Selection




Field-adjustable CCT
Field-adjustable wattage
Photocell ON/OFF
Light Direction Selection



Field-adjustable CCT
Field-adjustable wattage
Photocell ON/OFF

Mounting Plate



LED Architectural Wall Pack

Performance Summary

Model NO. #	Size	Watts	3 CCT	LPW	Lighting Direction	Voltage	Dim	CRI	Beam Angle
SU-WP-120W-30/40/50K-G2 604675486604	13"	120/100/90/60W Selectable	3CCT Selectable 3000K 4000K 5000K	150lm/W	UP & Down Lighting Down Lighting Selectable	AC120-277V	0-10V	>80	Type III
SU-WP-120W-30/40/50K-G3 604675368351	13"	120/100/90/60W Selectable	3CCT Selectable 3000K 4000K 5000K	150lm/W	UP & Down Lighting Down Lighting Selectable	AC120-277V	0-10V	>80	Type III
SU-WP-120W-30/40/50K-G4 604675311784	13"	120/100/90/60W Selectable	3CCT Selectable 3000K 4000K 5000K	150lm/W	Down Lighting Selectable	AC120-277V	0-10V	>80	Type III

Remarks: 1. All above efficacy and lumens are subject to CRI>80 @4000K, please check IES files for accurate data.

2. SU-WP-120W-30/40/50K-G2, xC: Use any character to represent the shell color. The default null value is brown, black is represented by BL, and white by WH

3. Factory default settings: Photocell is ON, lighting direction is full, max wattage, highest CCT.

Performance

- LED Type: SMD2835
- Operating Temp.: -40°F to 122°F (-40°C to +50°C)
- Life Time: L70 @ 50,000Hrs
- Frequency: 50/60HZ
- IP Rating: IP65
- Surge Protection: L/N 6KV, L/N-P 6KV
- Power Factor: ≥0.90
- THD: <20%
- L-N/L&N-PE: 4+6KV(120-277V, 40W)

Construction

- Lens: Polycarbonate
- Housing: Die-cast aluminum
- Finish: Bronze, Custom finishes available


Mounting

- Wall Mount


LED Architectural Wall Pack

Product Dimension


(unit: mm & inch)

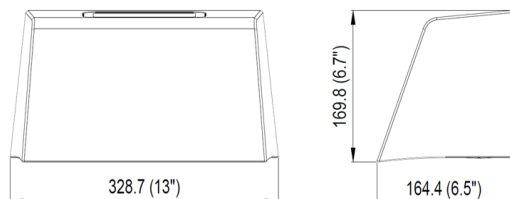

SU-WP-120W-30/40/50K-G2

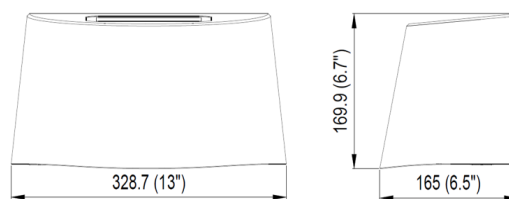

SU-WP-120W-30/40/50K-G3

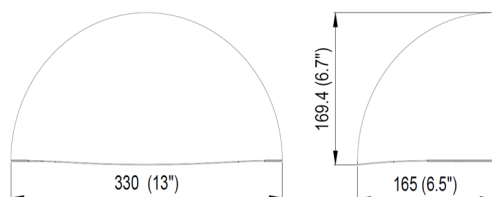

SU-WP-120W-30/40/50K-G4

Packing Info.

Product Size (inch&mm)	Product & Package Weight (KG)		Carton Size (inch&mm)	Q'ty/CTN (PCS)
	N.W./PC	G.W./CTN		
SU-WP-120W-30/40/50K-G2 13.0*6.5*6.7" 328.7*164.4*169.8mm	2.75	3.2	13.6×7.9×7.8" 345×201×198mm	1
SU-WP-120W-30/40/50K-G3 13.0*6.5*6.7" 328.7*165.0*169.9mm	2.67	3.14	13.6×7.9×7.8" 345×201×198mm	1
SU-WP-120W-30/40/50K-G4 13.0*6.5*6.7" 330.0*165.0*169.4mm	2.33	2.83	13.6×7.9×7.8" 345×201×198mm	1