

FUNCTION ADJUSTMENT:

Follow the instructions below to change the Fixture Power (W), Color temperature (CCT), Light Direction(L), and Photocell ON/OFF(P) from factory settings:


Factory default settings: Photocell is ON, Max wattage, 5000K, light direction is full.

1. Remove the selector switch cover plug as shown in the Function Adjustment.
2. Select the Color Temperature(CCT), Power (W), Light Direction(L), and Photocell ON/OFF(P) position by sliding the respective switch to the desired value.



Do not operate with power on.

Please turn off the power when adjusting the power or color temperature.

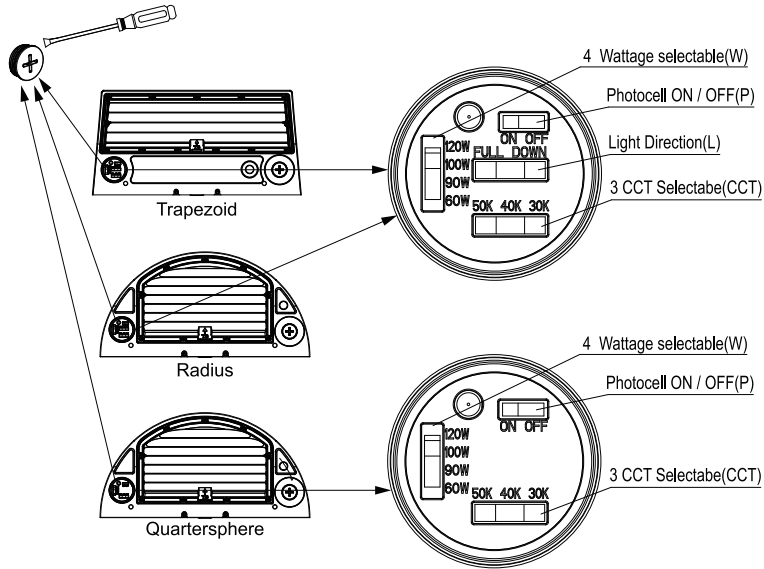

CONNECTION DIAGRAM:


WARNING: TURN OFF POWER BEFORE CONNECTING WIRES

Black wire connects to L, White wire connects to N, Green wire connects to GROUND

For 0-10V dimming, the wiring direction is as below:

1. Turn off the power.
2. Connect the BLACK wire with the LINE.
3. Connect the WHITE wire with the NEUTRAL.
4. Connect the GREEN wire with the GROUND,
5. Connect the PURPLE wire with the (V+) DIM.
6. Connect the PINK wire with the (V-) DIM.

CAUTION: DO NOT connect the PINK (-) DIM V- wire with GROUND.




MAINTENANCE AND CLEANING:

WARNING: TURN OFF POWER BEFORE MAINTENANCE AND CLEANING.


1. Before touching the fixture, make sure the fixture is cooling.
2. Do not clean or maintain while the fixture is energized.
3. Clean the lens & fixture with a non-abrasive glass cleaning solution.
4. Do not open the fixture to clean and touch LED chips.

LED Wall Pack


Installation Instructions

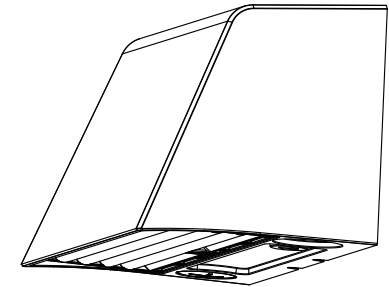

Trapezoid

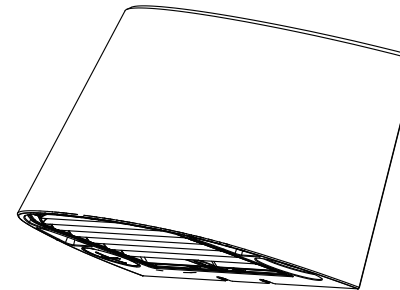

Radius

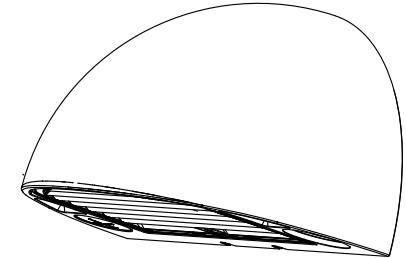


Quartersphere


MAINTENANCE CAUTION:

ACCESSORIES		
	UNC screws	4PCS
	Self-drilling screw	4PCS
	Twist-on wire connector	5PCS


Quartersphere

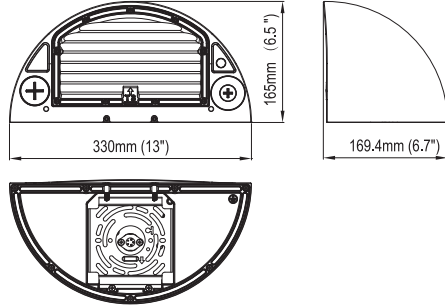

Radius

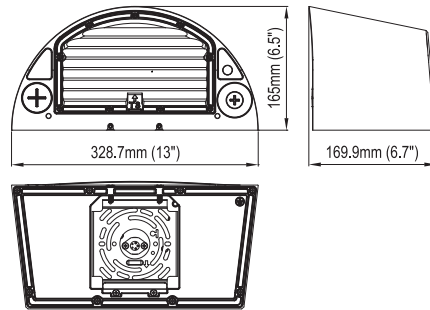

Trapezoid

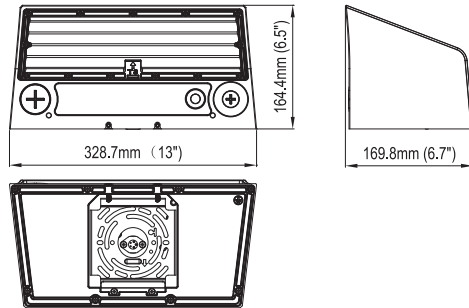

IMPORTANT CAUTION:


READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

WARNING: TURN OFF POWER BEFORE INSTALLATION.


1. Review the diagrams before beginning, and make sure the fixture is grounded properly.
2. This fixture has to be installed or maintained in accordance with the application code by a professional person who is familiar with the construction and operation of the product and the hazards involved.
3. This fixture must be wired in accordance with the international electrical code and applicable local codes and ordinances.
4. Proper grounding is required to ensure personal safety. Carefully observe the correct grounding procedure under the installation section.
5. Check that the voltage is compatible with the fixture driver, and use approved connectors for all electrical connections.

INSTALLATION:

1. Use a hex screwdriver to loosen the two securing screws, then remove the mounting plate.

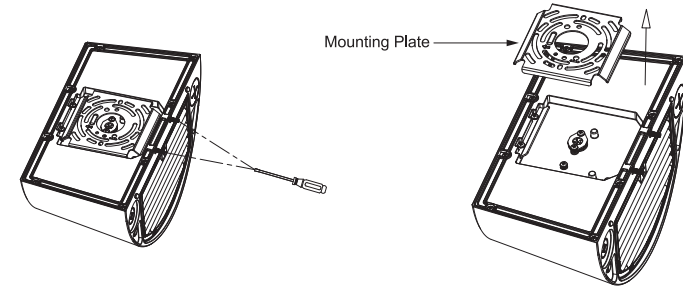

2. Fix the mounting plate to the wall at the desired position using screw. Connect the corresponding terminals according to the wiring diagram. Connect Line, Neutral and Ground wires properly.

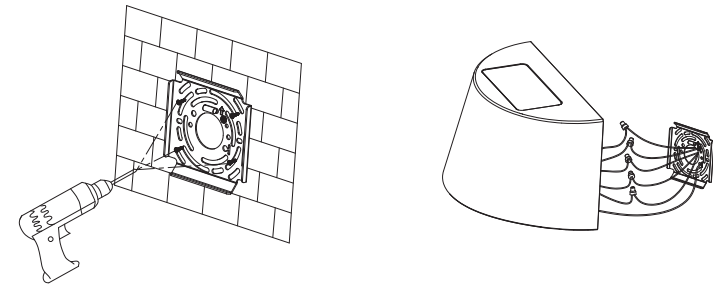

3. Put the product onto the mounting plate, tighten the securing screws. Apply weatherproof silicone sealant between the wall and fixture housing to ensure a weatherproof installation. After the product is installed, as shown in the following figure, remove the two drain hole plugs to prevent internal water accumulation.

