LED SLIM DOWN LIGHT

PICTURE



PRODUCT FEATURES

Construction

· Ultra-thin 11mm.

Optics

· 5 CCT selectable.

Electrical

· It features electronic voltage120V Nominal（100-130V AC）operation.

· Support SCR dimming.

Certifications

· ETL and Energy Star are certificated.

Warranty

· Five-year limited warranty.

PERFORMANCE DATA

Model No.	Item Name	Watt	CCT select.	Voltage	Lumens	Beam Angle	CRI	Installation	Size
BQ-FPL-U120-9-T	SDL2-4'-9W-5CCT-SQ	9W	3000/3500/4000/5000/6500K	AC120V	720lm	120°	》80	Recessed	4"
BQ-FPL-U175-12-T	SDL2-6'-12W-5CCT-SQ	12W	3000/3500/4000/5000/6500K	AC120V	960lm	120°	》80	Recessed	6"

DIMENSIONS

unit: mm/inch

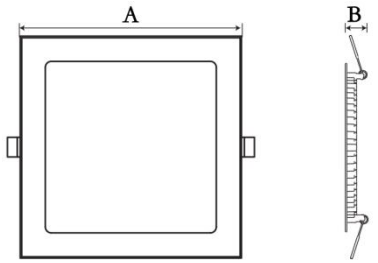

Watt	A	B
9W	120mm/4.7"	11mm/0.4"
12W	175mm/6.8"	11mm/0.4"

PACKING

Watt	Outer Carton	QTY/CTN	Weight
9W	22.4*13*12.8 in	40 pcs	27lb
12W	23.2*12.6*14.6 in	30 pcs	30.9lb